

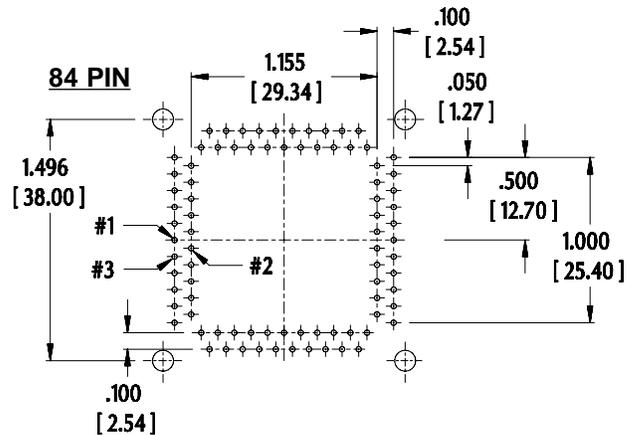
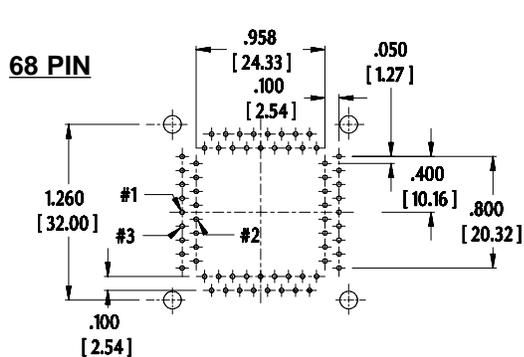
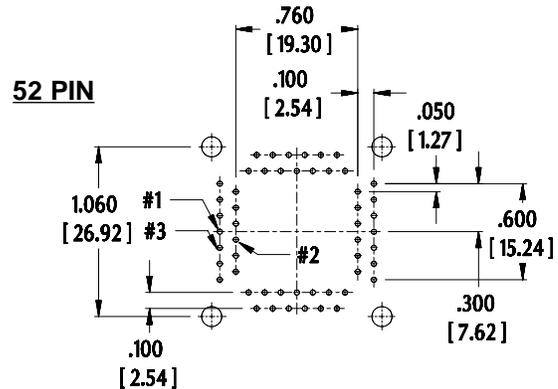
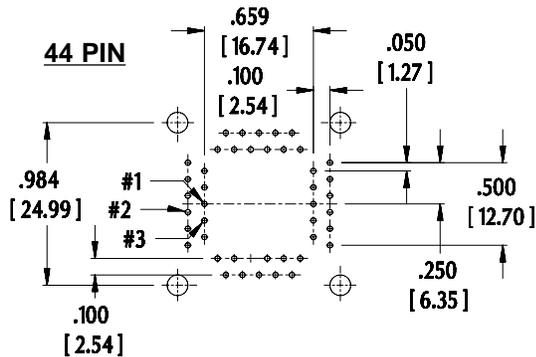
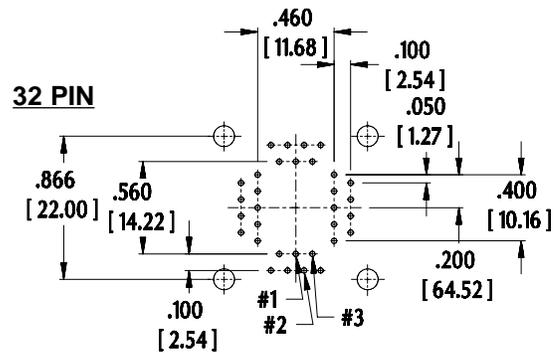


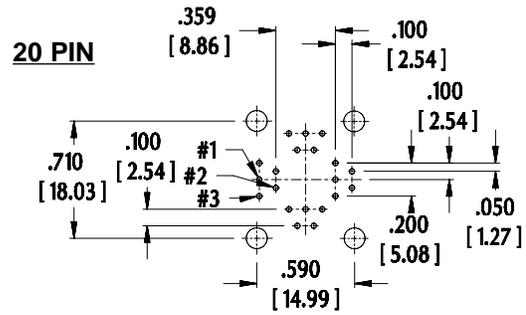

Series 536 PLCC Test & Burn-in Zero Insertion Force Sockets (cont.)

- All footprints shown are top view (component side), with latch side on left, hinge side on right.
- Footprint tolerances:
 Row-to-row: $\pm .003$ [$\pm .08$]
 Pin-to-pin: $\pm .003$ [$\pm .08$] non-cumulative.
- Suggested pin mounting holes:
 $.032 \pm .002$ [$.81 \pm .05$] diameter.
- Suggested socket mounting holes: $.125$ [3.18] dia.

See Data Sheet No. 10006 for additional information.

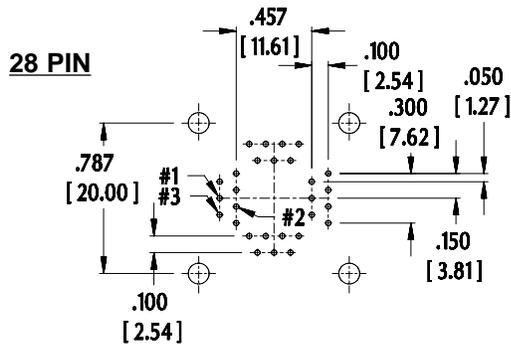

SIBALCO

Käppelinstraße 12
 D-79576 Weil am Rhein

Tel. +49 (0) 7621 78011 info@sibalco.de
 Fax +49 (0) 7621 78013 www.sibalco.de

10007
 REV.B